



PARAMETERS

Fs	34 Hz
Qms	3.4
Cms	0.100 mm/N
Mms	218 g
Rms	13.724 kg/s
Vas	1.57 ft ³ (44.4 liters)
Xmax	0.6 in (15.24 mm)
D	10.562 in (268.3 mm)
Sd	87.44 in ² (564.1 cm ²)
Vd	52.46 in ³ (0.859 liters)
Qes	0.863
Re	0.85Ω
Bl	6.8 Tm
Prms	400 Watts
Qts	0.69
n0	0.196%
SPLo	85.1 dB
SPL 2.83 V/1m	94.8 dB
Disp	0.07 ft ³ (1.98 liters)

DIMENSIONS

Total Diameter	12-3/8" (314.3 mm)
Cutout Diameter	11-3/16" (284.2 mm)
Mounting Depth	6-1/4" (158.8 mm)


RECOMMENDED POWER RATING

200 Watts - 400 Watts RMS

RECOMMENDED ENCLOSURES

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

SEALED ENCLOSURE

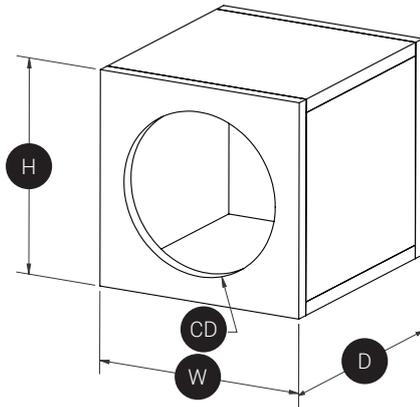


DIMENSIONS

Height	15" (381 mm)
Width	21-1/2" (546.1 mm)
Depth	10" (254 mm)
Cutout Diameter	ø11-3/16" (284.2 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	1.25 ft ³

VENTED ENCLOSURE

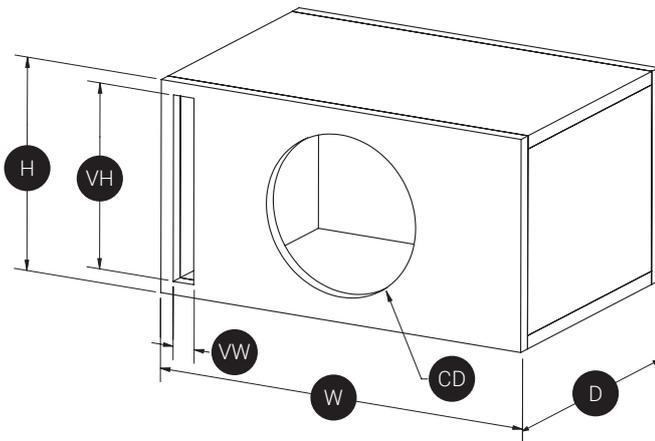

DIMENSIONS

Height	15" (381 mm)
Width	23" (584.2 mm)
Depth	14-1/2" (368.3 mm)
Vent Height	13-1/2" (342.9 mm)
Vent Width	1-1/4" (31.8 mm)
Vent Panel 1	11-3/4" (298.5 mm)
Vent Panel 2	6-1/2" (165.1 mm)
Cutout Diameter	ø11-3/16" (284.2 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	1.8 ft ³
Vent Area	16.875 in ²

