



PARAMETERS

Fs	26 Hz
Qms	5.61
Cms	0.126 mm/N
Mms	313 g
Rms	8.66 kg/s
Vas	5.114 ft ³ (144.8 liters)
Xmax	0.66 in (16.8 mm)
D	13.32 in (338.4 mm)
Sd	139.44 in ² (899.6 cm ²)
Vd	91.66 in ³ (1.502 liters)
Qes	0.66
Re	0.80Ω
Bl	7.77 Tm
Prms	750 Watts
Qts	0.59
n0	0.372%
SPLo	87.53 dB
SPL 2.83 V/1m	97.11 dB
Disp	0.10 ft ³ (2.84 liters)

DIMENSIONS

Total Diameter	15-1/2" (393.7 mm)
Cutout Diameter	14-1/16" (357.2 mm)
Mounting Depth	8-13/16" (211.1 mm)


RECOMMENDED POWER RATING

375 Watts - 750 Watts RMS

RECOMMENDED ENCLOSURES

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.


SEALED ENCLOSURE

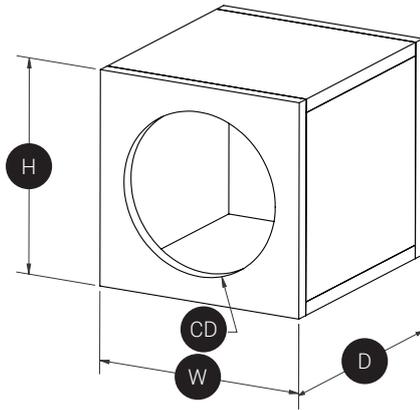

DIMENSIONS	
Height	18" (457.2 mm)
Width	20" (508 mm)
Depth	12" (304.8 mm)
Cutout Diameter	ø14-1/16" (357.2 mm)

PARAMETERS	
Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	1.75 ft ³

VENTED ENCLOSURE

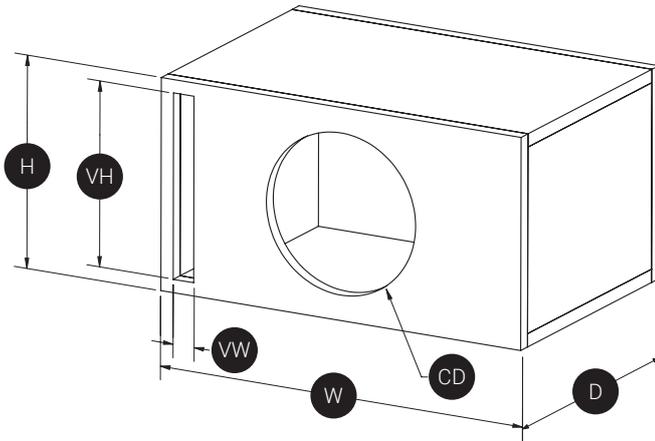

DIMENSIONS	
Height	18" (457.2 mm)
Width	30" (762 mm)
Depth	15" (381 mm)
Vent Height	16-1/2" (419.1 mm)
Vent Width	1-3/4" (44.5 mm)
Vent Panel 1	12-1/2" (317.5 mm)
Vent Panel 2	9-7/8" (250.8 mm)
Cutout Diameter	ø14-1/16" (357.2 mm)

PARAMETERS	
Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	3.0 ft ³
Vent Area	28.875 in ²

