

**PARAMETERS**

Fs	25 Hz
Qms	2.89
Cms	0.135 mm/N
Mms	301 g
Rms	16.36 kg/s
Vas	5.690 ft ³ (161.2 liters)
Xmax	0.6 in (15.24 mm)
D	13.5 in (342.9 mm)
Sd	142.38 in ² (918.6 cm ²)
Vd	85.43 in ³ (1.399 liters)
Qes	1.13
Re	0.89Ω
Bl	6.1 Tm
Prms	400 Watts
Qts	0.81
n0	0.215%
SPLo	85.5 dB
SPL 2.83 V/1m	95.0 dB
Disp	0.11 ft ³ (3.11 liters)

DIMENSIONS

Total Diameter	15-7/16" (392.1 mm)
Cutout Diameter	13-7/8" (352.4 mm)
Mounting Depth	7-15/16" (201.6 mm)


RECOMMENDED POWER RATING

200 Watts - 400 Watts RMS

RECOMMENDED ENCLOSURES

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

SEALED ENCLOSURE

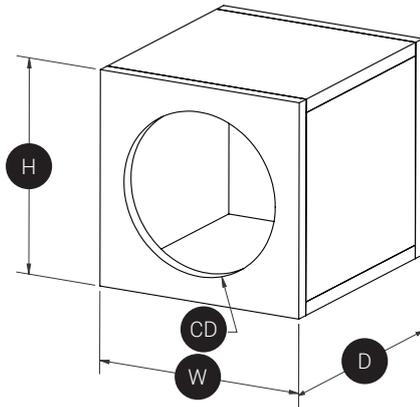


DIMENSIONS

Height	18" (457.2 mm)
Width	20" (508 mm)
Depth	12" (304.8 mm)
Cutout Diameter	ø13-7/8" (352.4 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	1.75 ft ³

VENTED ENCLOSURE

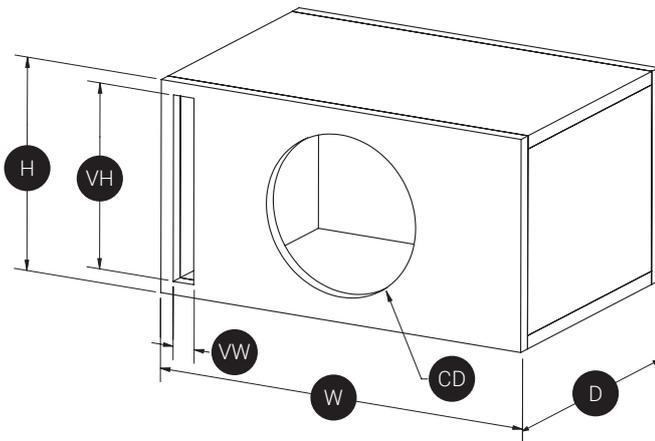

DIMENSIONS

Height	18" (457.2 mm)
Width	28" (711.2 mm)
Depth	15" (381 mm)
Vent Height	16-1/2" (419.1 mm)
Vent Width	1-3/4" (44.5 mm)
Vent Panel 1	11-3/4" (298.5 mm)
Vent Panel 2	10-1/4" (260.4 mm)
Cutout Diameter	ø13-7/8" (352.4 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	2.75 ft ³
Vent Area	28.875 in ²

