



PARAMETERS

Fs	32 Hz
Qms	4.34
Cms	0.109 mm/N
Mms	222 g
Rms	10.81 kg/s
Vas	1.757 ft ³ (49.77 liters)
Xmax	0.66 in (16.7 mm)
D	10.625 in (269.9 mm)
Sd	87.89 in ² (567 cm ²)
Vd	57.49 in ³ (0.942 liters)
Qes	0.764
Re	1.65Ω
Bl	9.82 Tm
Prms	750 Watts
Qts	0.649
n0	0.206%
SPLo	85.34 dB
SPL 2.83 V/1m	92.19 dB
Disp	0.077 ft ³ (2.2 liters)

DIMENSIONS

Total Diameter	12-3/4" (323.9 mm)
Cutout Diameter	11-3/16" (284.2 mm)
Mounting Depth	7-7/16" (188.9 mm)


RECOMMENDED POWER RATING

375 Watts - 750 Watts RMS

RECOMMENDED ENCLOSURES

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

SEALED ENCLOSURE

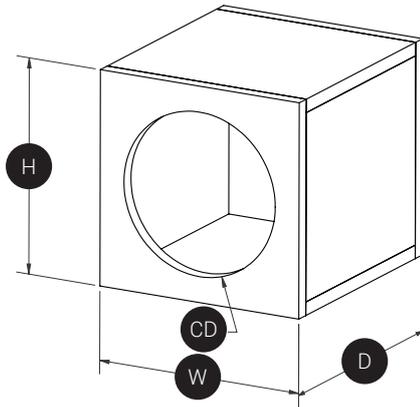


DIMENSIONS

Height	15" (381 mm)
Width	21.5" (546.1 mm)
Depth	10" (254 mm)
Cutout Diameter	ø11-3/16" (284.2 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	1.25 ft ³

VENTED ENCLOSURE

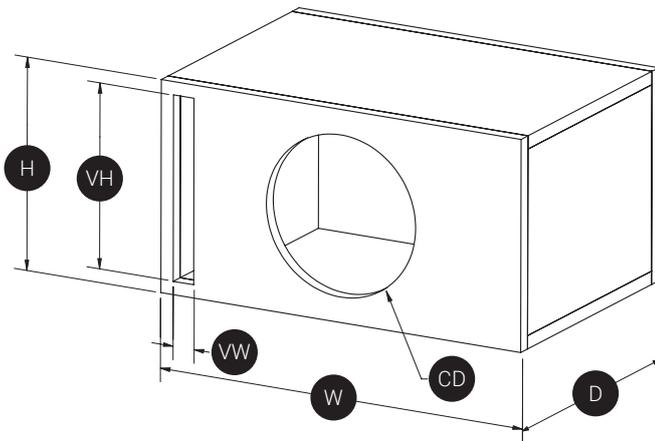

DIMENSIONS

Height	15" (381 mm)
Width	26" (660.4 mm)
Depth	14-1/2" (368.3 mm)
Vent Height	13-1/2" (342.9 mm)
Vent Width	1-1/2" (38.1 mm)
Vent Panel 1	12-1/4" (311.2 mm)
Vent Panel 2	9" (228.6 mm)
Cutout Diameter	ø11-3/16" (284.2 mm)

PARAMETERS

Material Thickness	3/4" (19 mm) MDF
Net Internal Volume	2.0 ft ³
Vent Area	20.25 in ²

